



Transformadores Secos Impregnados

Transformadores monofásicos / 1,5 a 30 kVA




P	L	P	H	L ₁	P ₁	Ø	Peso
kVA	mm						kg
1,5	195	110	279	80	80	8,5	18
2	195	120	279	80	90	8,5	22
3	195	155	279	80	125	9,5	31
4	240	132	360	150	100	11	34
5	240	142	360	150	110	11	41
6,5	280	152	410	175	120	11	50
8	280	162	410	175	135	11	60
10	320	167	460	200	130	13	74
12,5	320	172	460	200	140	13	83
15	360	182	510	225	150	13	105
20	360	192	510	225	160	13	117
25	400	192	560	250	160	13	145
30	400	202	560	250	170	13	158

Transformadores monofásicos / 40 a 200 kVA

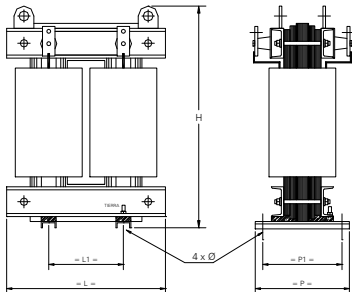

P	L	P	H	L ₁	P ₁	Ø	Peso
kVA	mm						kg
40	440	310	665	220	260	12	190
50	470	340	715	235	290	12	230
63	500	340	765	250	290	12	290
75	540	340	815	270	290	12	340
100	580	370	855	290	320	14	410
125	600	370	895	300	320	14	480
160	640	370	945	320	320	14	570
200	680	400	995	340	350	14	660

Gabinete de protección IP23

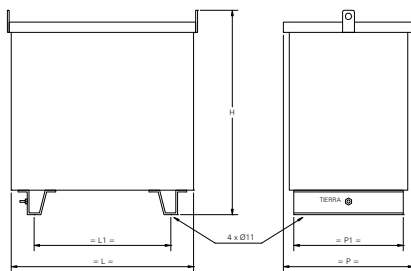

Liviano – Para Transformadores monofásicos

Modelo	P	L	P	H	L ₁	P ₁	Peso
kVA	mm						kg
ML-0	1,5-3	342	350	530	250	250	14,3
ML-1	4-8	428	410	642	300	300	20
ML-2	10-30	553	530	815	415	400	33
ML-3	40-75	704	630	1070	480	460	67
ML-4	100-200	904	730	1230	570	560	93,3

Liviano – Para Transformadores trifásicos

Modelo	P	L	P	H	L ₁	P ₁	Peso
kVA	mm						kg
TL-0	1,5-3,5	442	350	530	350	250	16,6
TL-1	5-12,5	528	410	642	430	300	22,6
TL-2	15-50	728	530	815	590	400	38,6
TL-3	63-125	929	630	1070	730	460	79
TL-4	160-250	1129	790	1238	860	560	123
TL-5	315-500	1330	900	1410	970	660	155